




4275.551 Shown

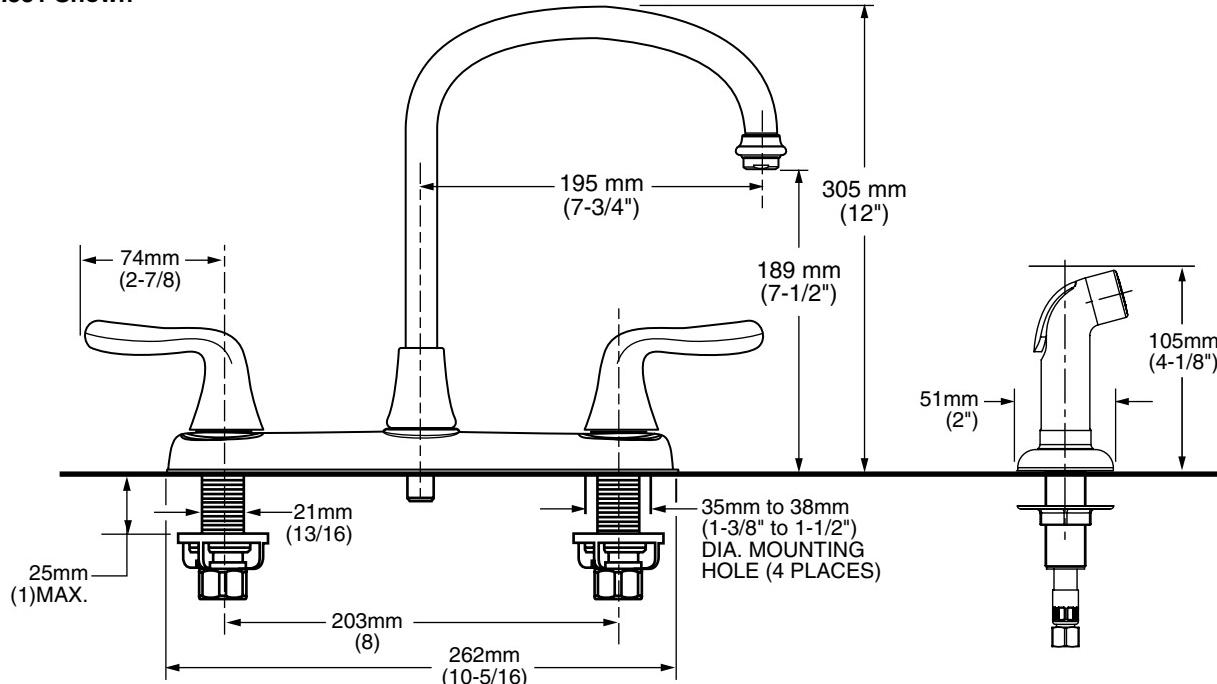

GENERAL DESCRIPTION:

Durable brass construction. 1/4 turn washerless ceramic disc valve cartridges. Durable cast brass waterway with 1/2" male inlet shanks. Brass gooseneck swivel spout and lever handles. Metal escutcheon plate (escutcheon size 10-5/16" L x 2-3/8"W). 2.2gpm/8.3L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION:

Two handle kitchen faucet shall feature brass construction with all brass inlet shanks and coupling nuts. Brass gooseneck swivel spout. Shall also feature 1/4 turn washerless ceramic disc valve cartridges that are reversible for use on either "hot" or "cold" side. Faucet shall be American Standard Model #4275.551.

CODES AND STANDARDS


These products meet or exceed the following codes and standards:

ASME A112.18.1

CSA B 125

NSF 61/Section 9

ANSI A117.1

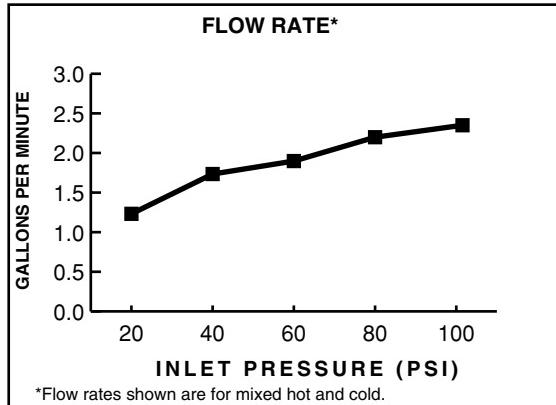

Product Number	Description	Finish Options	
		Polished Chrome	PVD Satin Nickel
4275.550	Kitchen faucet. Lever handles. Less Handspray.	002	295
4275.551	Kitchen faucet. Lever handles. Separate Handspray.		

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.